

Electrical characteristics are guaranteed over the max hotspot temperature range (-40 to 110°C), for the full range of input voltage ( $V_i$ ), and for the full load range ( $I_{o\ min}$  to  $I_{o\ rated}$ ) unless otherwise noted.  $V_i$ ,  $V_o$ , and  $I_o$  are actual operating conditions,  $I_{o\ rated}$  is nominal rating.

## Electrical Specifications

**36-76V in; 5.0V/25A out**

### Input Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$V_i$	Input voltage		36.0	48.0	76.0	V
$P_{iL}$	No load input power	$V_i = V_{i\ nom}$		0.2		W
$C_{iN}$	Input capacitance (internal)			11		$\mu$ F
$I_i$	Input ripple current ①	$V_i = V_{i\ nom}, I_o = I_{o\ rated}$		50		mA p-p

### Output Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$P_{O\ max}$	Total output power ②			125		W
$V_{O1\ nom}$	Nominal (factory set) output voltage Output 1		4.95	5.00	5.05	V
$I_{O1\ rated}$	Rated output current Output 1	$T_{Hotspot} = 110^\circ\text{C}$	0		25	A
	Noise and ripple ③ Output 1	Pk-pk, 20MHz bandwidth with a 0.1 $\mu$ F ceramic capacitor		50	100	mV
$V_{O1}$	Load regulation ④	From 10% to 100% of rated output current			0.5	% $V_{O1}$
$V_{O1}$	Line regulation ④	$V_{i\ min}$ to $V_{i\ max}$ $I_o = I_{o\ typ}$			0.2	% $V_{O1}$
$I_{O1\ lim}$	Current limit			30		A
	Temperature coefficient	Per $^\circ\text{C}$ hotspot temperature		$\pm 0.02$		% $V_{O\ nom}/^\circ\text{C}$



Electrical characteristics are guaranteed over the max hotspot temperature range (-40 to 110°C), for the full range of input voltage ( $V_I$ ), and for the full load range ( $I_{O\ min}$  to  $I_{O\ rated}$ ) unless otherwise noted.  $V_I$ ,  $V_O$ , and  $I_O$  are actual operating conditions,  $I_{O\ rated}$  is nominal rating.

## Electrical Specifications

**36-76V in; 5.0V/25A out**

### Output Characteristics - continued

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$\eta$	Efficiency $\text{Ⓢ}$	$V_I = 48.0\text{ Vdc}$ , $I_O = I_{O\ rated}$ (see eff. graph)	93	94		%
$t_{on}$	Turn-on time	$V_I = 0$ to $V_{Inom}$ $V_I = 0$ to $V_{Imin}$ $V_I = 0$ to $V_{Imax}$		250 250 250		mS mS mS
	Transient Response	positive or negative step $I_O = 50\%$ to $100\% I_{O\ rated}$ @ $1A/\mu s$ total deviation		60 3	200 3	$\mu s$ % $V_{O1\ nom}$

### Control Signals -Pins

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$V_{Out}$	Output Voltage	Remote On/Off pin $4.5 < V_C < 50$ or open circuit $V_C < 0.4V$		5.0 0		V V
$V_{Out}$	Output Voltage	Trim Adjust	90		110	%



Electrical characteristics are guaranteed over the max hotspot temperature range (-40 to 110°C), for the full range of input voltage ( $V_i$ ), and for the full load range ( $I_{o\ min}$  to  $I_{o\ rated}$ ) unless otherwise noted.  $V_i$ ,  $V_o$ , and  $I_o$  are actual operating conditions,  $I_{o\ rated}$  is nominal rating.

**Electrical Specifications**

**36-76Vin; 5.0V/25A out**

**Isolation Characteristics**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
	Input to Output	2800Vdc	50			Mohm

**Thermal Charecteristics**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
	Normal Convection	$R_{\theta\ HS-A}$		12.8		°C/Watt



**Notes:**

- ❶ Input ripple current measured with additional external input filtering as follows: 47 $\mu$ f electrolytic, 1.5 $\mu$ H inductor, 47 $\mu$ f electrolytic.
- ❷ Total output power of converter may not be exceeded by the trim and or remote sense function increasing V out. The rated power output is based on the V out measurement obtained at the output power pins multiplied by the output current.
- ❸ Output ripple and noise measured is specified over a 20MHz bandwidth. When testing output ripple it is important to reduce the ground connection for the scope to less than .5".
- ❹ Line and Load regulation are measured from the (+) remote sense and the (-) remote sense. Measurements should be taken at the pins in order to eliminate variations caused by line loss due to highly resistive connections.
- ❺ Because of the nature of low voltage outputs, efficiency calculations are often made in error. The total power out of the converter is the measurement of the voltage AT THE POWER PIN and the common pin multiplied by the load current. You then divide that number by the measured input voltage AT THE (+) INPUT PIN and the input common pin multiplied by the input current draw. Any deviation from the above mentioned method will result in efficiencies values much lower than what are actually obtained.




Efficiency

(Typ)

Figure 1


Efficiency Vs Line and Load

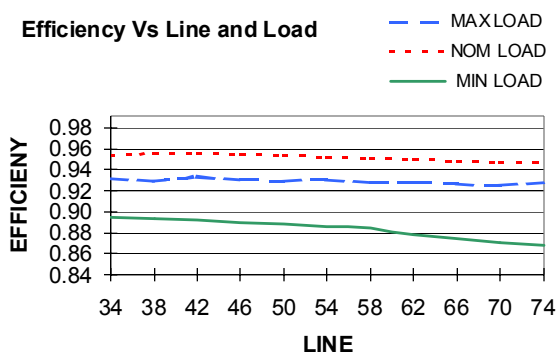

Power Dissipation Vs. Loading (Typ)

Figure 2


Power dissipated in watts

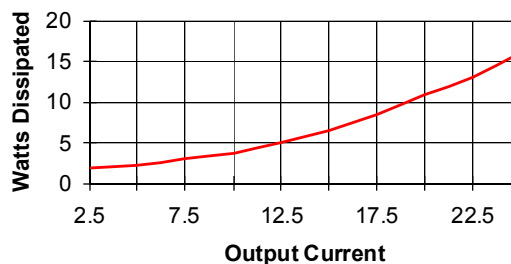

Output Regulation Vs. Loading (Typ)


Figure 3

Output Vs line and Load

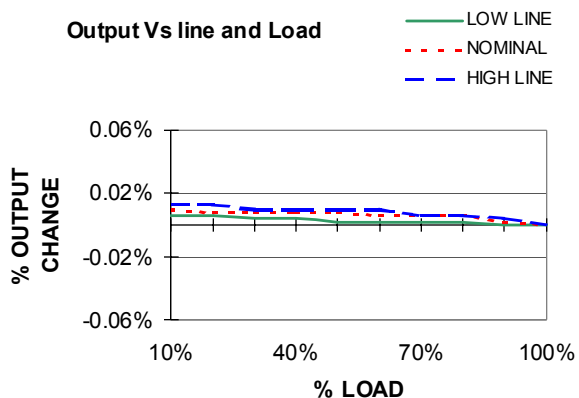

MTBF


Figure 4

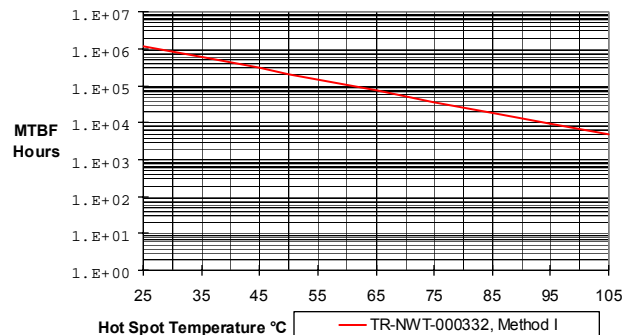

Turn on Characteristics (Typ)


$V_{in} = 48.0 \text{ Vdc}$ ,  $I_{load} = 25\text{A}$

Figure 5

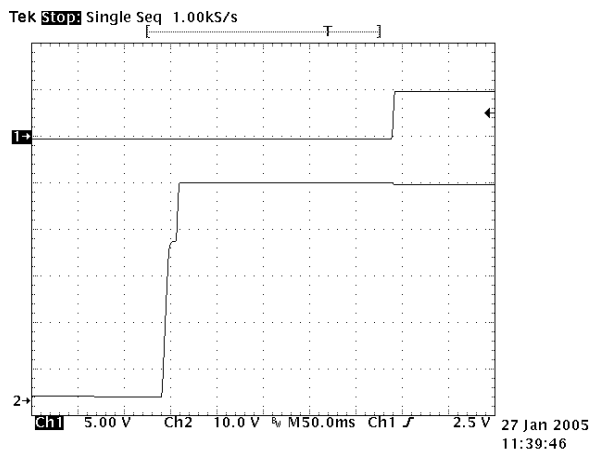


Input Reflected Ripple 10mA/mV

Figure 6

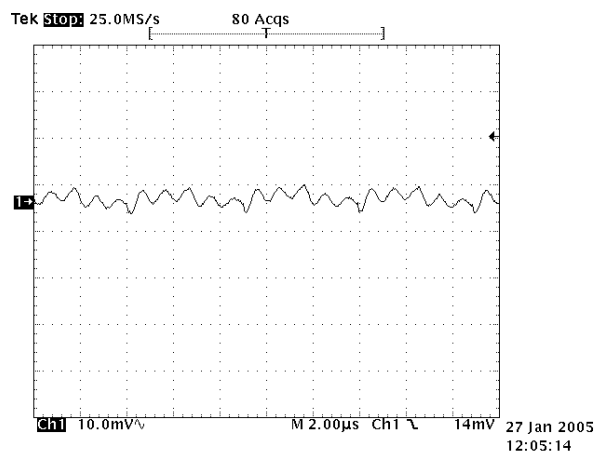


Enable going high

Figure 7

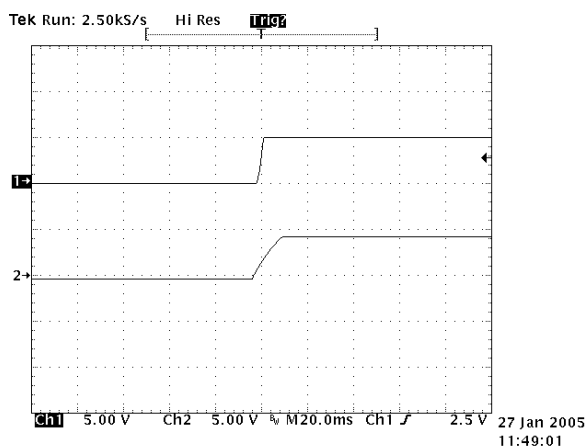

Enable going low

Figure 8

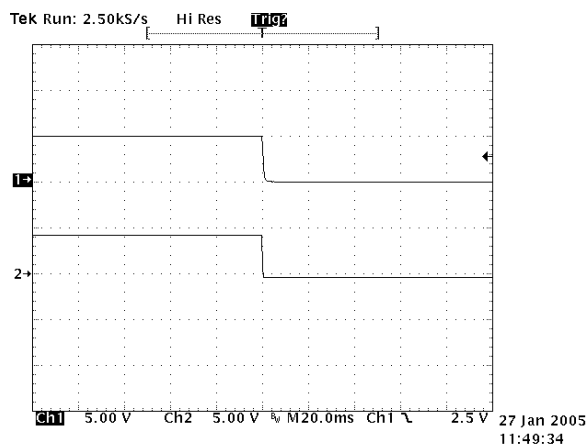


Output Characteristics (Typ)

Figure 9


Output Ripple

$V_{in} = 48.0 \text{ Vdc}$ ,  $I_{load} = 25\text{A}$   
3.3 $\mu\text{f}$  electrolytic across  
output pins

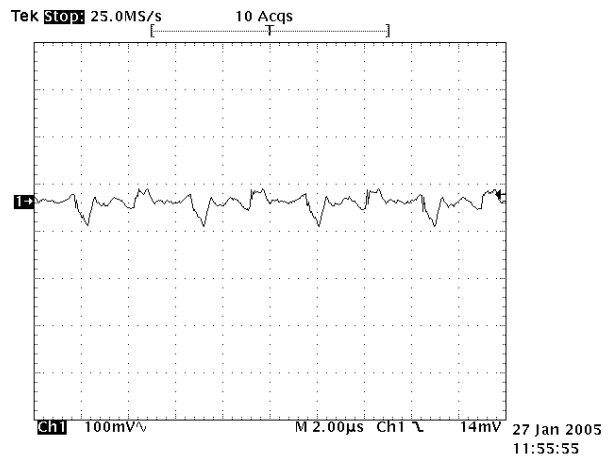

Dynamic Load Response  
50%-100% load swing

Figure 10

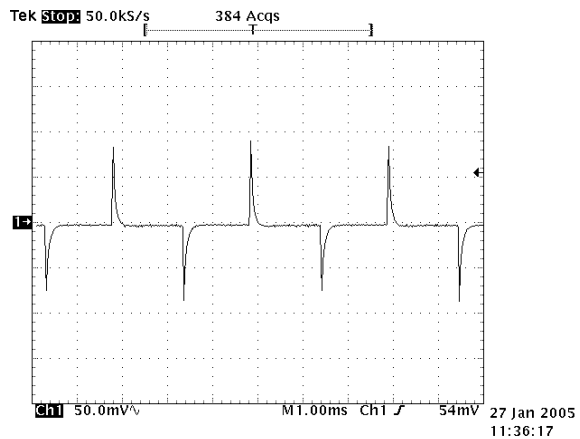

**PIN CONNECTIONS**

- 1. Input Common
- 2. No Pin
- 3. Remote On/Off
- 4. + Input
- 5. + Output
- 6. + Sense
- 7. Trim
- 8. - Sense
- 9. Output Common

**PIN DIAMETERS**

- Pins 1-4, 6-8      0.040 ±0.002
- Pins 5,9            0.080 ±0.002

Figure 11

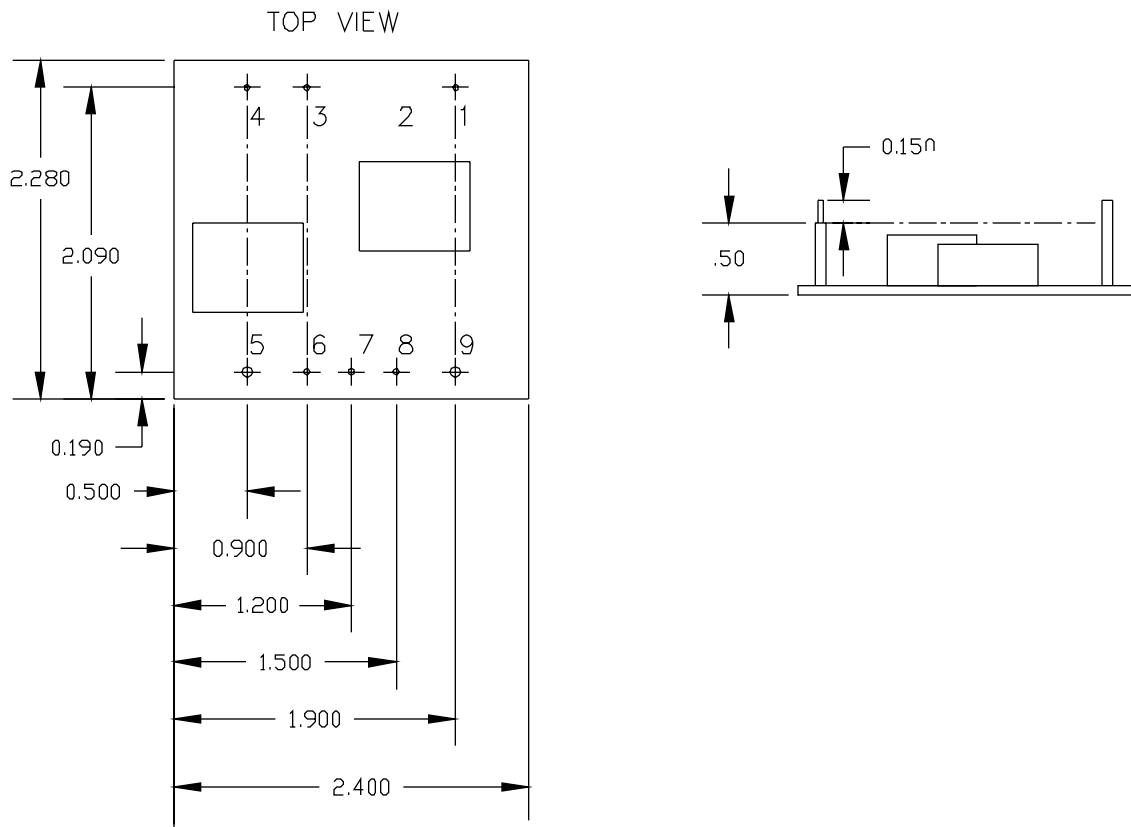


Figure 11

