

Electrical characteristics are guaranteed over the max hotspot temperature range (-40 to 110°C), for the full range of input voltage (V_i), and for the full load range ($I_{o\ min}$ to $I_{o\ rated}$) unless otherwise noted. V_i , V_o , and I_o are actual operating conditions, $I_{o\ rated}$ is nominal rating.

Electrical Specifications

18-76V in; 24.0V/2.5A out

Input Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_i	Input voltage		18.0	48.0	76.0	V
P_{iL}	No load input power	$V_i = V_{i\ nom}$		0.2		W
C_{iN}	Input capacitance (internal)			11		μ F
I_i	Input ripple current ❶	$V_i = V_{i\ nom}, I_o = I_{o\ rated}$		50		mA p-p

Output Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$P_{O\ max}$	Total output power ❷			60		W
$V_{O1\ nom}$	Nominal (factory set) output voltage Output 1		23.76	24.00	24.24	V
$I_{O1\ rated}$	Rated output current Output 1	$T_{Hotspot} = 110^\circ\text{C}$	0		2.5	A
	Noise and ripple ❸ Output 1	Pk-pk, 20MHz bandwidth with a 0.1 μ F ceramic capacitor		50	100	mV
V_{O1}	Load regulation ❹	From 10% to 100% of rated output current			0.5	% V_{O1}
V_{O1}	Line regulation ❹	$V_{i\ min}$ to $V_{i\ max}$ $I_o = I_{O\ typ}$			0.2	% V_{O1}
$I_{O1\ lim}$	Current limit			2.8		A
	Temperature coefficient	Per $^\circ\text{C}$ hotspot temperature		± 0.02		% $V_{O\ nom}/^\circ\text{C}$



Electrical characteristics are guaranteed over the max hotspot temperature range (-40 to 110°C), for the full range of input voltage (V_i), and for the full load range ($I_{o\ min}$ to $I_{o\ rated}$) unless otherwise noted. V_i , V_o , and I_o are actual operating conditions, $I_{o\ rated}$ is nominal rating.

Electrical Specifications

18-76V in; 24.0V/2.5A out

Output Characteristics - continued

Symbol	Parameter	Conditions	Min	Typ	Max	Units
η	Efficiency $\text{\textcircled{E}}$	$V_i = 48.0\text{ Vdc}$, $I_o = I_{o\ rated}$ (see eff. graph)	87	89		%
t_{on}	Turn-on time	$V_i = 0$ to V_{Inom} $V_i = 0$ to V_{Imin} $V_i = 0$ to V_{Imax}		250 250 250		mS mS mS
	Transient Response	positive or negative step $I_o = 50\%$ to 100% $I_{o\ rated}$ @ $1A/\mu s$ total deviation		60 3	200 3	μs % $V_{O1\ nom}$

Control Signals -Pins

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{Out}	Output Voltage	Remote On/Off pin $4.5 < V_c < 50$ or open circuit $V_c < 0.4V$		24.0 0		V V
V_{Out}	Output Voltage	Trim Adjust	90		110	%



Electrical characteristics are guaranteed over the max hotspot temperature range (-40 to 110°C), for the full range of input voltage (V_i), and for the full load range ($I_{o\ min}$ to $I_{o\ rated}$) unless otherwise noted. V_i , V_o , and I_o are actual operating conditions, $I_{o\ rated}$ is nominal rating.

Electrical Specifications

18-76Vin; 24.0V/2.5A out

Isolation Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Units
	Input to Output	1500Vdc	50			Mohm

Thermal Charecteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Units
	Normal Convection	$R_{\theta\ HS-A}$		12.8		°C/Watt

Notes:


- ❶ Input ripple current measured with additional external input filtering as follows: 47 μ f electrolytic, 1.5 μ H inductor, 47 μ f electrolytic.
- ❷ Total output power of converter may not be exceeded by the trim and or remote sense function increasing V out. The rated power output is based on the V out measurement obtained at the output power pins multiplied by the output current.
- ❸ Output ripple and noise measured is specified over a 20MHz bandwidth. When testing output ripple it is important to reduce the ground connection for the scope to less than .5".
- ❹ Line and Load regulation are measured from the (+) remote sense and the (-) remote sense. Measurements should be taken at the pins in order to eliminate variations caused by line loss due to highly resistive connections.
- ❺ Because of the nature of low voltage outputs, efficiency calculations are often made in error. The total power out of the converter is the measurement of the voltage AT THE POWER PIN and the common pin multiplied by the load current. You then divide that number by the measured input voltage AT THE (+) INPUT PIN and the input common pin multiplied by the input current draw. Any deviation from the above mentioned method will result in efficiencies values much lower than what are actually obtained.



Efficiency


(Typ)

Figure 1

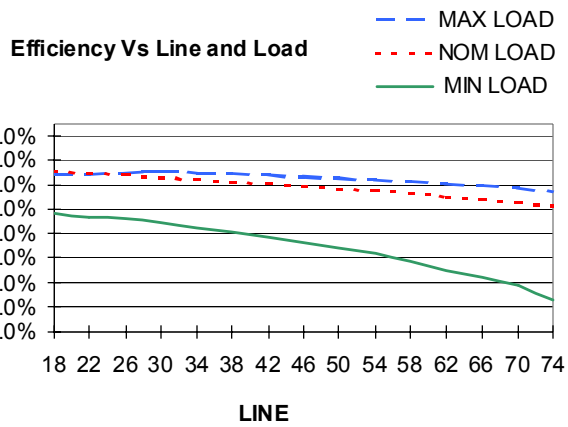


Power Dissipation Vs. Loading (Typ)

Figure 2

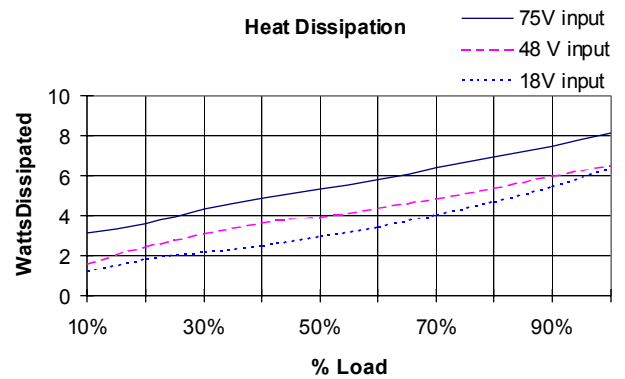


Output Regulation Vs. Loading (Typ)

Figure 3

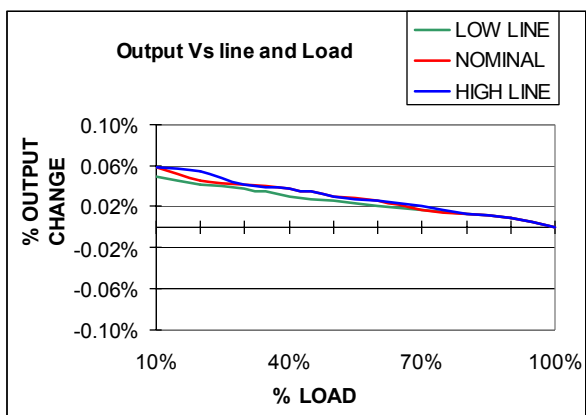

MTBF


Figure 4

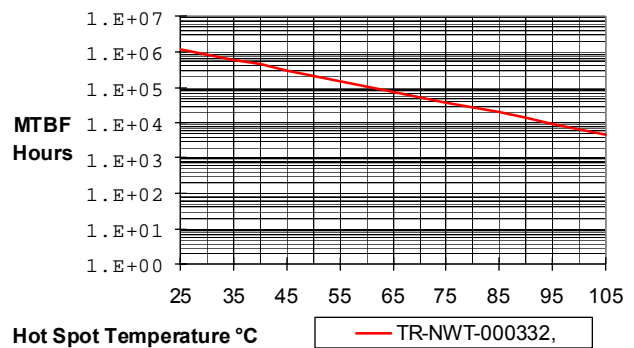

Turn on Characteristics (Typ)


$V_{in} = 48.0 \text{ Vdc}$, $I_{load} = 2.5 \text{ A}$

Figure 5

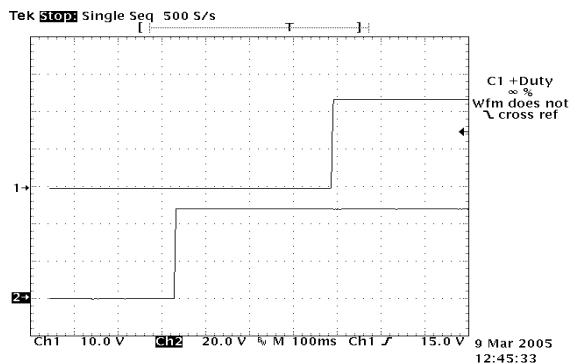


Input Reflected Ripple 10mA/mV

Figure 6

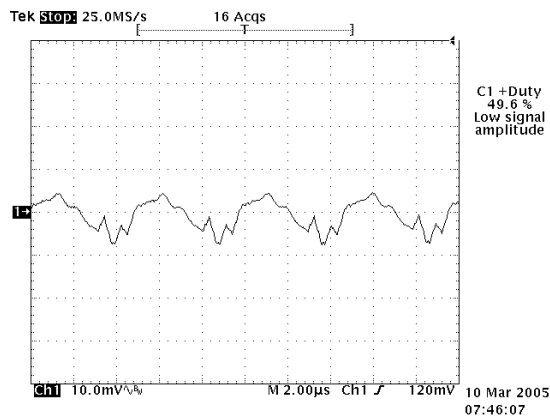


Enable going high

Figure 7

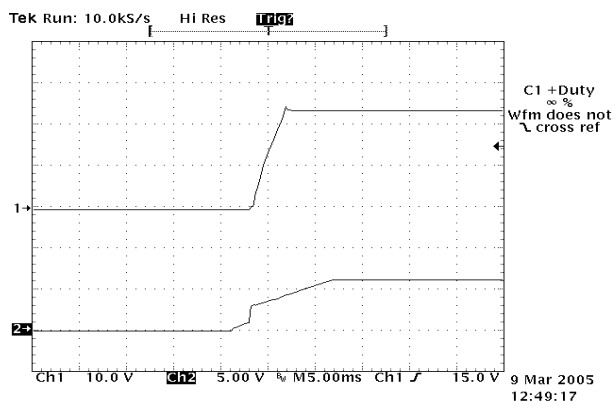

Enable going low

Figure 8

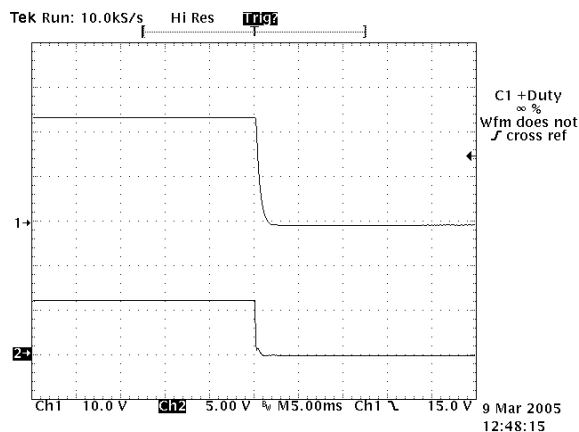


Output Characteristics (Typ)

Figure 9


Output Ripple

$V_{in} = 48.0 \text{ Vdc}$, $I_{load} = 2.5\text{A}$
47 μf electrolytic across
output pins

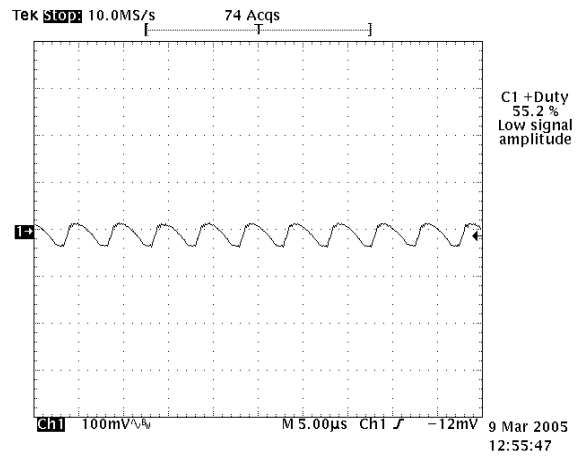

Dynamic Load Response
50%-100% load swing

Figure 10

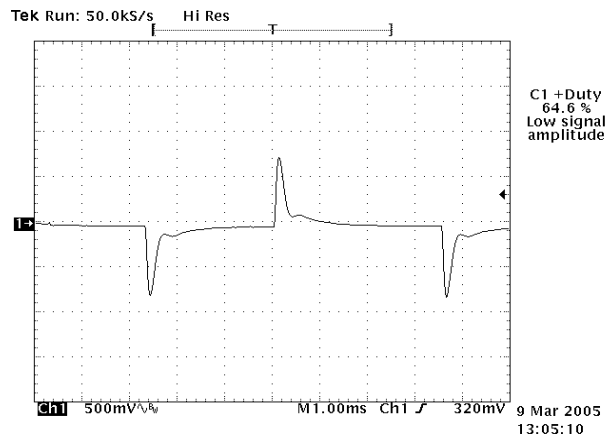

PIN CONNECTIONS

- 1. Input Common
- 2. No Pin
- 3. Remote On/Off
- 4. + Input
- 5. + Output
- 6. + Sense
- 7. Trim
- 8. - Sense
- 9. Output Common

PIN DIAMETERS

- Pins 1-4, 6-8 0.040 ±0.002
- Pins 5,9 0.080 ±0.002

Figure 11

