


## COOL POWER TECHNOLOGIES

### Sixteenth-Brick Isolated DC/DC Converter

#### Features

- Ultra-wide input voltage range: 9 – 36Vin
- Output: 5 V at 10 A, 50W max.
- High efficiency – 90% typical
- RoHS 3 Directive 2015/863/EU
- No minimum load/capacitance required
- Low height - 0.374" (9.5mm) max.
- Baseplate option - 0.500" (12.7mm) tall
- Fixed-frequency operation
- Industry standard 1/16<sup>th</sup> brick footprint
- Withstands 50 V input transients
- Remote sense
- Full protection (OTP, OCP, OVP, UVLO – auto-restart)
- Remote ON/OFF - positive or negative enable logic options
- Output voltage trim range:  $\pm 10\%$  (industry-standard trim equations)
- Weight: 0.44 oz (12.5 g) open frame, 0.72 oz (20.5 g) baseplate model
- On-board input differential LC-filter
- Meets UL94, V-0 flammability rating
- Compliant to REACH (EC) No 1907/2006, 205 SVHC update
- Complies with UL/CSA60950-1, TUV per IEC/EN60950-1, 2<sup>nd</sup> edition
- Designed to meet Class B conducted emissions per FCC and EN55032 when used with external filter (see EMC Compliance section below.)

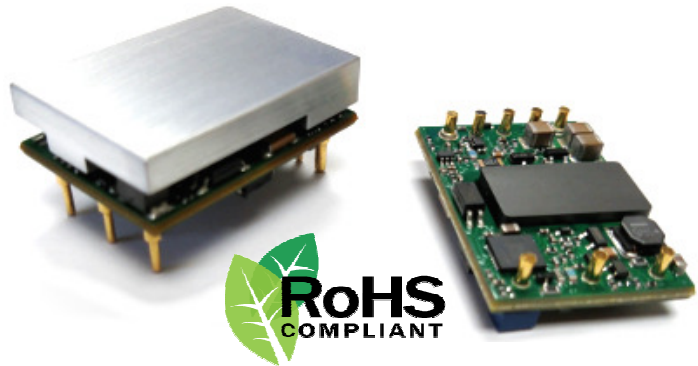

#### Description


The CPT10A18 “Cool Power Technologies” DC-DC converter is an open frame sixteenth-brick DC-DC converter that conforms to industry standard specifications. The converter operates over an input voltage range of 9 to 36 VDC, and provides a tightly regulated output voltage with an output current rating of 10 A. The output is fully isolated from the input and the converter meets Basic Insulation requirements. The standard feature set includes remote On/Off (positive or negative enable), input undervoltage lockout, output overvoltage protection, overcurrent/short circuit protection, output voltage trim, remote sense and overtemperature shutdown with hysteresis. The high efficiency of the CPT10A18 allows operation over a wide ambient temperature range with minimal derating.



### TABLE OF CONTENTS

SECTION	PAGE
FEATURES & DESCRIPTION	1
APPLICATION DIAGRAM	2
ELECTRICAL SPECIFICATIONS	3
CHARACTERISTIC PERFORMANCE CURVES	6
CHARACTERISTIC WAVEFORMS	7
APPLICATION NOTES	8
• RIPPLE MEASUREMENTS TEST SET-UP	8
• OUTPUT VOLTAGE TRIM EQUATIONS	9
• THERMAL DERATING	10
• EMC COMPLIANCE	12
MECHANICAL OUTLINE & PCB FOOTPRINT	13
ORDERING INFORMATION	15

### APPLICATION DIAGRAM

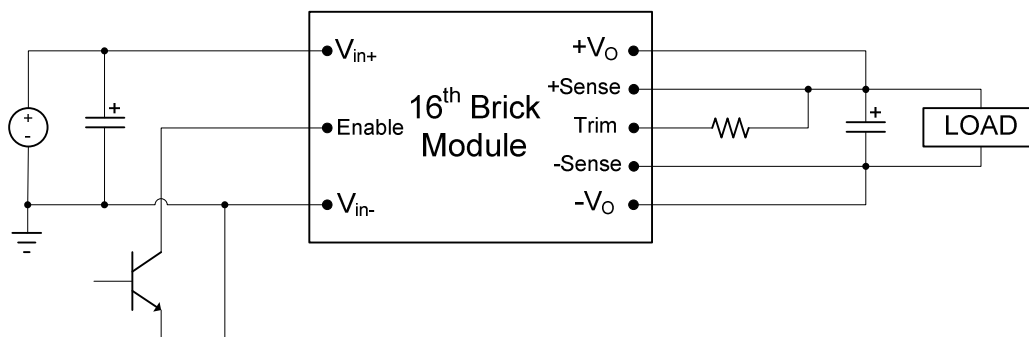

ELECTRICAL SPECIFICATIONS

9–36Vin, 5.0V/10Aout

Conditions:  $T_A = 25\text{ }^\circ\text{C}$ , Airflow = 300 LFM,  $V_{in} = 24\text{ VDC}$ ,  $C_{in} = 100\text{ }\mu\text{F}$ , unless otherwise specified.

Input Characteristics					
Parameter	Conditions	Min	Typ	Max	Unit
Operating Input Voltage Range		9	24	36	VDC
Input Under-Voltage Lock-out Turn-on Threshold		8.7	8.9	9.1	VDC
Turn-off Threshold		7.6	7.9	8.2	
Input Voltage Transient	100ms			50	VDC
Maximum Input Current	$V_{in} = 9\text{VDC}; I_{out} = 10\text{A}$			6.5	A
Input Standby Current	Converter Disabled		2	5	mA
Input No-Load Current	Converter Enabled		100	120	mA
Short Circuit Input Current	RMS		40		mA
Input Reflected Ripple Current	5Hz to 50MHz See Fig 13 for setup		20	30	$\text{mA}_{\text{PK-PK}}$
Input Voltage Ripple Rejection	120Hz		50		dB
Inrush Current	All	-	-	0.01	$\text{A}^2/\text{s}$
Output Characteristics					
Parameter	Conditions	Min	Typ	Max	Unit
Output Voltage Set point	Sense pins connected to output pins	4.925	5	5.075	VDC
Output Current		0		10	A
Output Current Limit Inception		11	14	18	A
Peak Short-Circuit Current	10m $\Omega$ Short			20	A
RMS Short-Circuit Current	10m $\Omega$ Short		1.5	2.5	$\text{A}_{\text{RMS}}$
External Load Capacitance				4700	$\mu\text{F}$
Output Ripple and Noise	20MHz Bandwidth 0.1 $\mu\text{F}$ Ceramic + 10 $\mu\text{F}$ Tantalum See Fig 13 for setup		125	200	$\text{mV}_{\text{PK-PK}}$
	0.1 $\mu\text{F}$ Ceramic + 22 $\mu\text{F}$ Ceramic See Fig 14 for setup		60	100	$\text{mV}_{\text{PK-PK}}$
Output Regulation			$\pm 1$	$\pm 5$	mV
Line:			$\pm 1$	$\pm 5$	mV
Load:					V
Overall Output Regulation:	Over line, load & temp.	4.85		5.15	



ELECTRICAL SPECIFICATIONS (continued)

9–36Vin, 5.0V/10Aout

Conditions:  $T_A = 25\text{ }^\circ\text{C}$ , Airflow = 300 LFM,  $V_{in} = 24\text{ VDC}$ ,  $C_{in} = 100\text{ }\mu\text{F}$ , unless otherwise specified.

Absolute Maximum Ratings					
Parameter	Conditions	Min	Typ	Max	Unit
Input Voltage	Continuous Operation	0		36	VDC
Operating Ambient Temperature	w/derating	-40		+85	$^\circ\text{C}$
Operating Temperature - $T_{ref}$ (See Thermal Derating section)	Open Frame	-40		+123 <sup>2</sup>	$^\circ\text{C}$
	Baseplate Option	-40		+115	$^\circ\text{C}$
Storage Temperature		-55		+125	$^\circ\text{C}$
Feature Characteristics					
Parameter	Conditions	Min	Typ	Max	Unit
Switching Frequency			410		kHz
Output Voltage Trim Range <sup>1</sup>		-10		+10	%
Remote Sense Compensation <sup>1</sup>				+10	%
Output Over-voltage Protection	Non-latching	115	125	140	%
Over-temperature Protection	Avg. PCB temp, non-latching		135		$^\circ\text{C}$
Peak Backdrive Output Current during startup into prebiased output	Sinking current from external voltage source equal to $V_{OUT} - 0.6\text{V}$ and connected to the output via $1\Omega$ resistor. $C_{OUT}=220\mu\text{F}$ , Aluminum		-	500	mA
Backdrive Output Current in OFF state	Converter disabled		0	5	mA
Enable to Output Turn-ON Time	$V_{OUT} = 0.9 \cdot V_{OUT\_NOM}$		20		ms
Output Enable ON/OFF Negative Enable Converter ON Converter OFF Positive Enable Converter ON Converter OFF	All voltages are WRT $-V_{in}$ .	-0.5		0.8	VDC
		2.4		20	VDC
	Converter has internal pull-up of approx. 5V	2.4		20	VDC
		-0.5		0.8	VDC
Enable Pin Current Source/Sink			0.25	1	mA
Output Voltage Overshoot @ Startup			0	2	%Vo
Auto-Restart Period	(all protection features)		100		ms



ELECTRICAL SPECIFICATIONS (continued)

9–36V<sub>in</sub>, 5.0V/10A<sub>out</sub>

Conditions: T<sub>a</sub> = 25 °C, Airflow = 300 LFM, V<sub>in</sub> = 48 VDC, C<sub>in</sub>=33 μF, unless otherwise specified.

Efficiency					
Parameter	Conditions	Min	Typ	Max	Unit
Full Load	V <sub>in</sub> = 12V <sub>in</sub>	89.5	90		%
	V <sub>in</sub> = 24V <sub>in</sub>	87	89.5		%
60% Load	V <sub>in</sub> = 12V <sub>in</sub>	89	90		%
	V <sub>in</sub> = 24V <sub>in</sub>	87	88		%
Dynamic Response					
Parameter	Conditions	Min	Typ	Max	Unit
Load Change 50%-75% or 25% to 50% of I <sub>out</sub> Max, di/dt = 0.1 A/μs	C <sub>o</sub> = 1 μF ceramic + 10 μF tantalum		100	200	mV
Settling Time to 1% of V <sub>out</sub>			50		μs
Load Change 50%-75% or 25% to 50% of I <sub>out</sub> Max, di/dt = 1.0 A/μs	C <sub>o</sub> = 1 μF ceramic + 100 μF Tantalum		100	200	mV
Settling Time to 1% of V <sub>out</sub>			50		μs
Isolation Specifications					
Isolation Capacitance			1000		pF
Isolation Resistance		10			MΩ
Isolation Voltage	Input to Output	2250			V <sub>DC</sub>
	Input to Baseplate	1500			V <sub>DC</sub>
	Output to Baseplate	1000			V <sub>DC</sub>
Reliability					
Per Telcordia SR-332, Issue 2: Method I, Case 3 (I <sub>o</sub> =80% of I <sub>o_max</sub> , T <sub>A</sub> =40°C, airflow = 200 lfm, 90% confidence)	MTFB		3,751,737		Hours
	FITs (failures in 10 <sup>9</sup> hours)		267		/10 <sup>9</sup> Hours

Notes:

- 1) Combination of trim + remote sense cannot exceed 10% of V<sub>o\_nom</sub>
- 2) 128C max for output inductor and main transformer



CHARACTERISTIC CURVES:

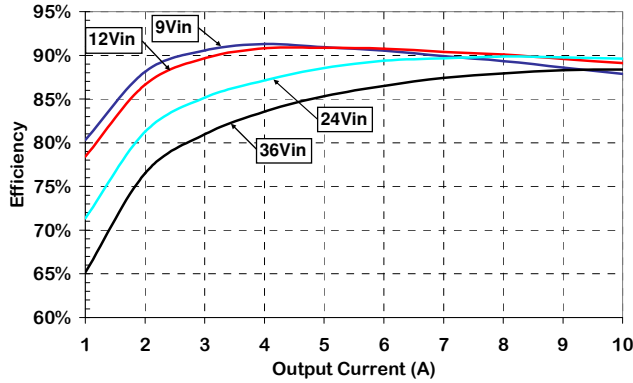


Figure 1. Efficiency vs Output Current, 300lfm airflow, 25°C ambient.

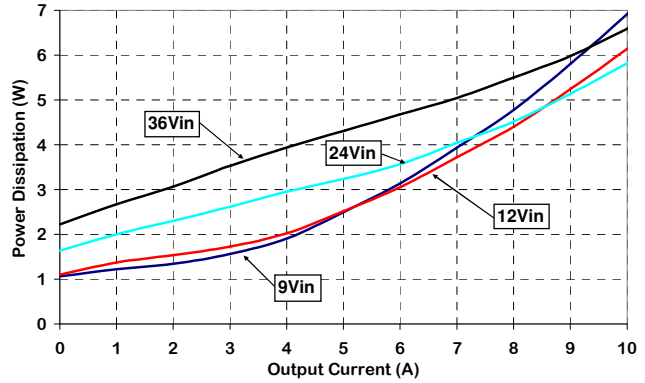


Figure 2. Power Dissipation vs. Load Current, 300lfm airflow, 25°C ambient.

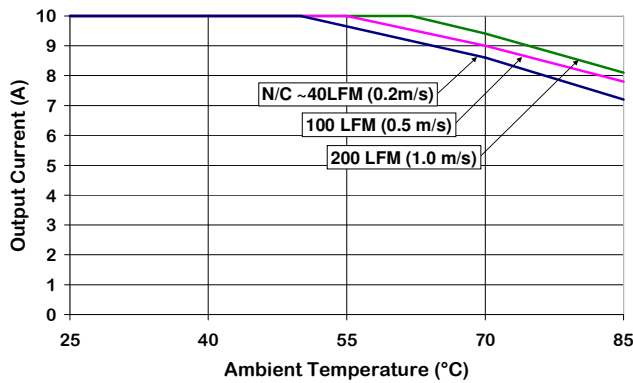


Figure 3. Output Current Derating vs Ambient Temperature & Airflow (air flowing from pin 3 to pin 1, Vin = 24 V, without baseplate)

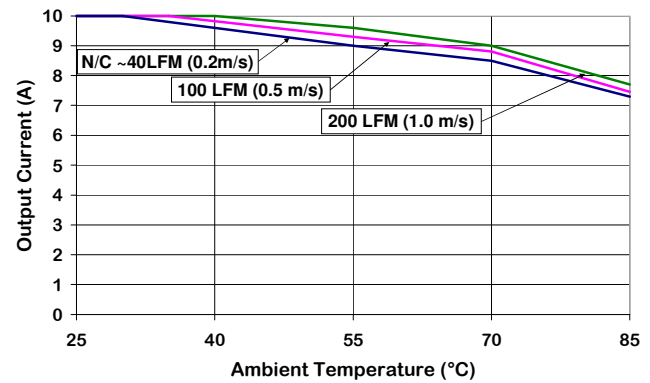


Figure 4. Output Current Derating vs Ambient Temperature & Airflow (air flowing from pin 3 to pin 1, Vin = 12 V, without baseplate)

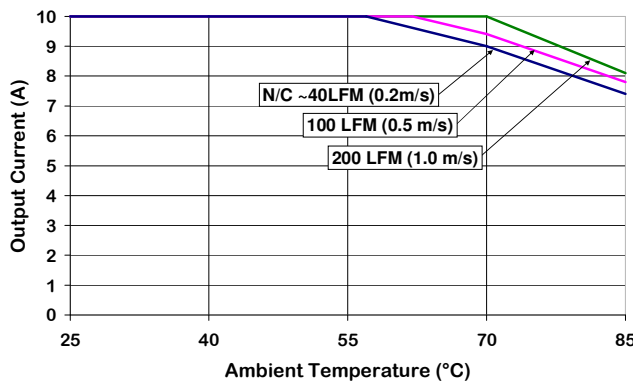


Figure 5. Output Current Derating vs Ambient Temperature & Airflow (air flowing from pin 3 to with pin 1, Vin = 24 V, with baseplate)

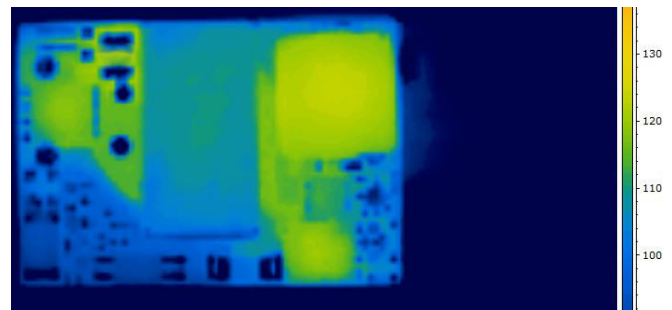


Figure 6. Thermal Image of CPT10A18 (10A output, 55C Ambient, 100lfm airflow, Vin = 24V, airflow from pin 3 to pin 1, T<sub>max</sub> = 127°C)

CHARACTERISTIC WAVEFORMS:

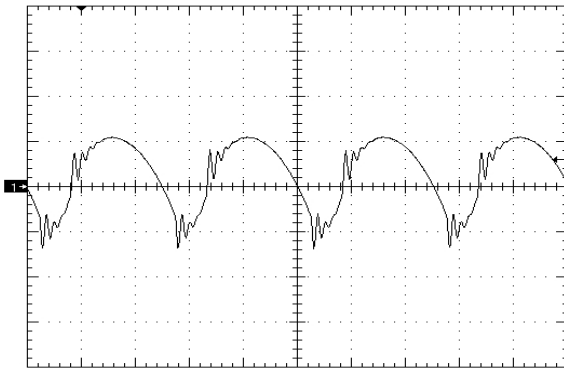


Figure 7. Output Voltage Ripple (50mV/div), time scale - 1uS/div. Vin=Vin\_nom, full resistive Cout=.1uF ceramic + 10uF Tantalum (see Fig 14)

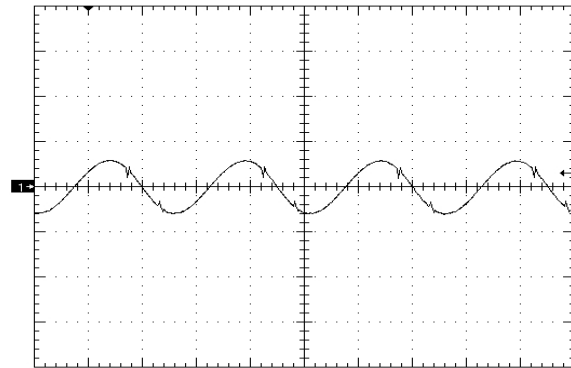


Figure 8. Output Voltage Ripple (50mV/div), time scale - 1uS/div. Vin=Vin\_nom, full resistive Cout=.1uF ceramic + 22uF Ceramic (see Fig 15)

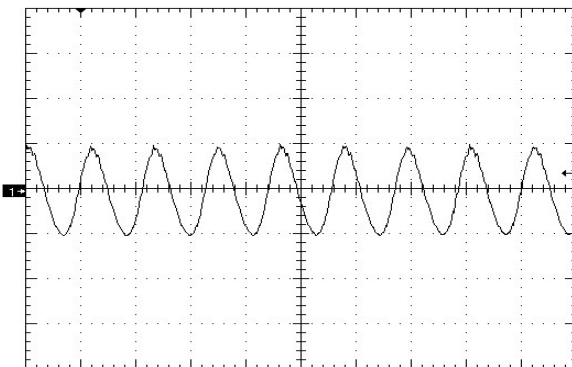


Figure 9. Input Reflected Ripple Current (10mA/div) time scale - 2uS/div. Vin=Vin\_nom, full resistive

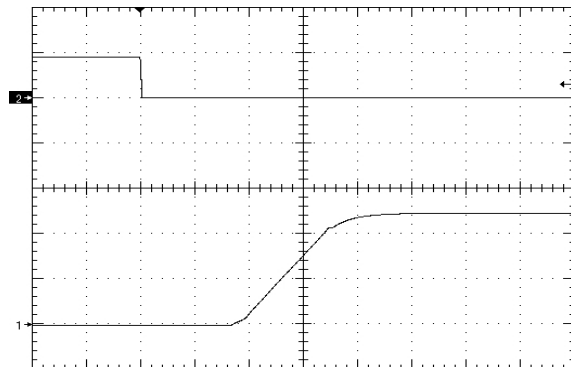


Figure 10. Startup Waveform (2V/div) via Enable Pin, time scale 5mS/div. Vin=Vin\_nom, full resistive load + 4700uF (negative enable.) Ch2=5V/div

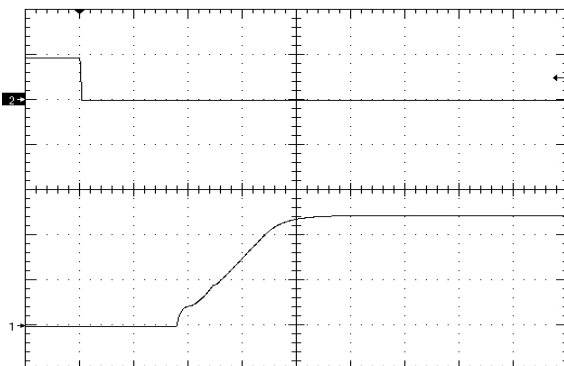


Figure 11. Waveform (2V/div) via Enable Pin, time scale 5mS/div. Vin=Vin\_nom, full resistive load (negative enable.) Ch2=5V/div


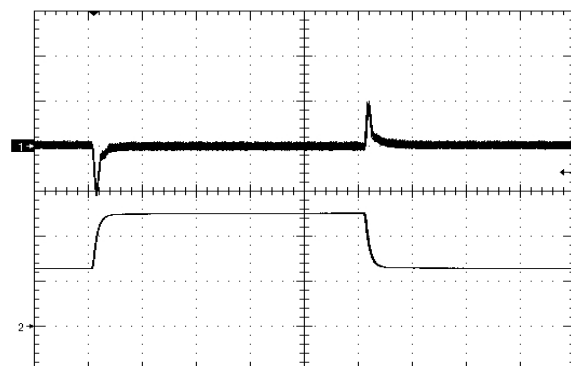


Figure 12. Load Transient Response (100mV/div), di/dt=0.1A/uS, 25% - 50% - 25% of full load, time scale: 200uS/div. Ch2 = 2A/div



### Application Notes


#### INPUT REFLECTED RIPPLE TEST SETUP:

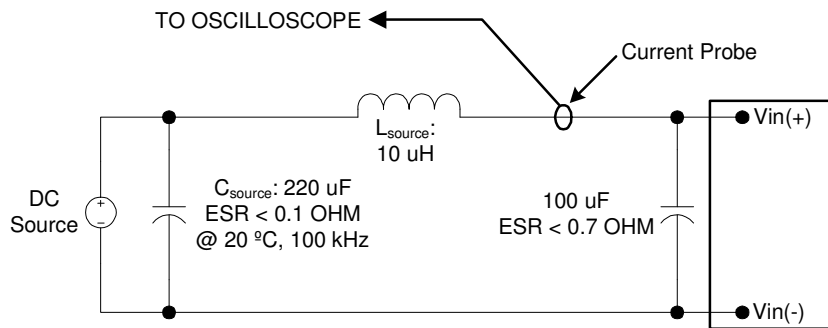

Note: Measure input reflected-ripple current with a simulated source inductance ( $L_{test}$ ) of 10  $\mu$ H. Capacitor  $C_s$  offsets possible source impedance.


Figure 13. Input Reflected-ripple Current Test Setup.

#### OUTPUT RIPPLE TEST SETUP:

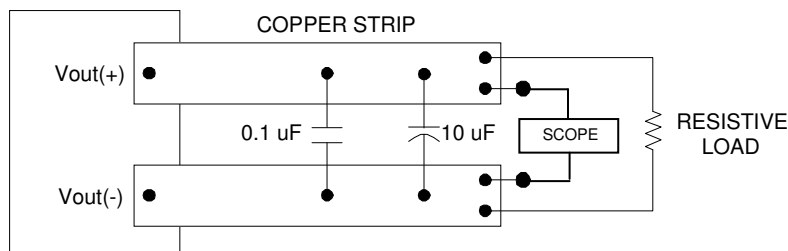

Note: Use a 0.1 $\mu$ F X7R ceramic capacitor and a 10 $\mu$ F @ 25V tantalum capacitor. Scope measurement should be made using a BNC socket. Position the load 3 in. [76mm] from module.

Figure 14. Peak-to-Peak Output Noise Measurement Test Setup.

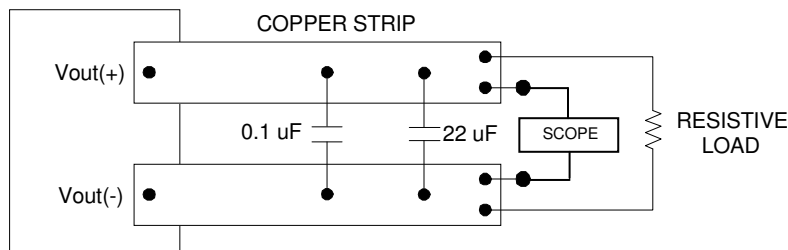

Note: Use a 0.1 $\mu$ F X7R ceramic capacitor and a 22 $\mu$ F @ 16V ceramic capacitor. Scope measurement should be made using a BNC socket. Position the load 3 in. [76mm] from module.

Figure 15. Peak-to-Peak Output Noise Measurement Test Setup (alt).



### Application Notes (cont)

#### Output Voltage Trim

Output voltage adjustment is accomplished by connecting an external resistor between the Trim Pin and either the +Sense or -Sense pins.

- TRIM UP EQUATION:**

$$R_{trim\_up} = \left[ \frac{5.1 \times V_{o\_nom} \times (100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{510}{\Delta\%} - 10.2 \right] \times k\Omega$$

Where  $R_{trim\_up}$  is the resistance value in k-ohms and  $\Delta\%$  is the percent change in the output voltage. E.g. to

trim the output up 10%,  $R_{trim\_up} = \left[ \frac{5.1 \times 5.0 \times (100 + 10)}{1.225 \times 10} - \frac{510}{10} - 10.2 \right] \times k\Omega$  or  $R_{trim\_up} = 168k\Omega$ .

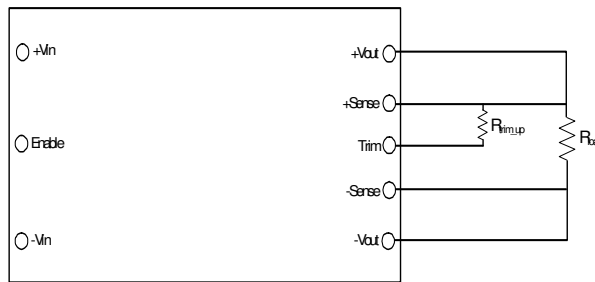


Figure 16. Trim UP circuit configuration

- TRIM-DOWN EQUATION:**

$$R_{trim\_down} = \left( \frac{510}{\Delta\%} - 10.2 \right) \times k\Omega$$

Where  $R_{trim\_down}$  is the resistance value in k ohms and  $\Delta\%$  is the percent change in the output voltage.


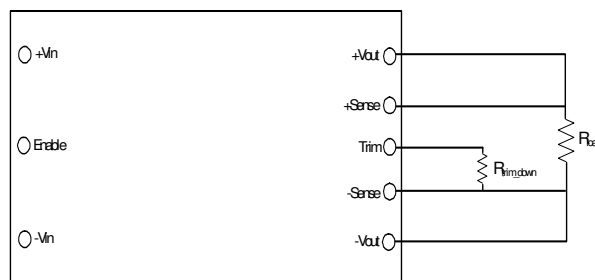


Figure 17. Trim DOWN circuit configuration

## Application Notes (cont)

### Thermal Derating

- It is preferable that the DC-DC module have an unobstructed flow of air across it for best thermal performance. Components taller than ~ 2mm in front of the module can deflect airflow and possibly create hotspots.
- Significant cooling is achieved through conductive flow from the modules I/O pins to the host PCB. Sufficiently large traces connecting the dc-dc converter to the source and load will help ensure thermal derating performance will meet or exceed the derating curves published in this datasheet. Thermal reliefs are not recommended on power pin connections.
- If the module is expected to be operated near the load limits defined in the derating curves, in-system verification of module derating performance should be performed to ensure long-term system reliability. Peak temperatures are to be measured using infrared thermography or by gluing a fine gauge (AWG #40) thermocouple at the  $T_{ref}$  location(s) shown below.  $T_{ref_2}$  should be monitored for input voltages below 18 Vin and limited to 123C to meet derating guideline.  $T_{ref_1}$  for input voltages > 18 Vin and limited to 128C.  $T_{BP}$  should be 115C max.

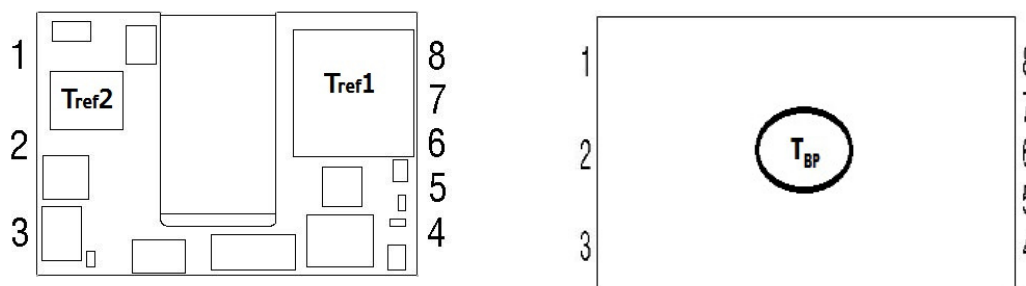

### Input Undervoltage Lockout

- The converter is disabled until the input voltage has exceeded the UVLO turn-on threshold. Once the input voltage exceeds this level (see Input Under-Voltage Lock-out in Electrical Specifications table) the module will commence soft-start. Hysteresis minimizes the likelihood of pulling the input voltage below the turn-off threshold during startup which could create an undesirable on/off cycling condition. Once started, the converter will continue to operate until the input voltage subsequently falls below the UVLO turn-off threshold.

### Enable Pin Function

- The module has a remote enable function that allows it to be turned on or off remotely. The Enable pin is referenced to the negative input pin (-Vin) of the converter. Modules can be ordered with either negative or positive enable.
- With the negative enable option, the converter will not turn on unless the enable pin is connected to  $-V_{in}$ . The positive enable option allows the converter to turn on as soon as voltage sufficient to exceed the UVLO threshold of the converter has been applied to the input terminals. In this case the module is turned off by connecting the Enable pin to  $-V_{in}$ . On/off thresholds are located in the Electrical Specifications table.

## Application Notes (cont)

### Output Overvoltage Protection

- The module has an independent feedback loop that will disable the output of the converter if a voltage greater than about 125% of the nominal set point is detected. When this threshold is reached, the converter will shut down and remain off for the amount of time specified by the Auto-Restart Period. The converter will attempt a restart once this period of time has elapsed.

### Output Overtemperature Protection

- To provide protection under certain fault conditions, the unit is equipped with a thermal shutdown circuit. The unit will shutdown if the average PCB temperature exceeds approx. 135°C, but the thermal shutdown is not intended as a guarantee that the unit will survive temperatures beyond its rating. The module will automatically restart once it has cooled below the shutdown temperature minus hysteresis (typically 20 deg C.)

### SMT Version Layout Considerations (if applicable)

- Copper traces with sufficient cross-section must be provided for all output & input pins. SMT pads tied to internal power/ground planes must have multiple vias around each SMT pad to couple expected current loads from module pins into internal traces/planes. One 0.024" (0.6mm) diameter via for each 4A of expected source or load current must be provided as close to the termination as possible, preferably in the direction of current flow from SMT pad to load. Vias must be at least 0.024" (0.6 mm) away from the SMT pad to prevent solder from flowing into the vias.
- SMT pads on the host card are to be 0.080" (2.03 mm) diameter. Solder paste screen opening should be 0.075" (1.9 mm) diameter and the screen should be 0.006" (0.15 mm) thick (other thicknesses are possible; 0.006" provides a good compromise between solder volume and coplanarity compensation.)

### Paralleling Converters

- Modules may be paralleled but it is recommended that the total power draw not exceed the output power rating of a single module. External sharing controllers are recommended for reliability and to ensure equal distribution of the load to the converters. In lower current applications, ORing diodes can be used to prevent converter interactions and improve current sharing.



Application Notes (cont)

EMC COMPLIANCE:

To meet Class B compliance for EN55032 (CISPR 32) or FCC part 15 sub part j, the following input filter is required:

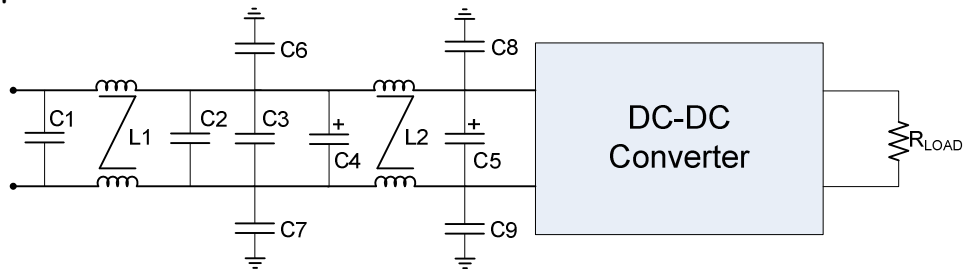


Figure 18. EMI Filter

L1, L2 =	0.59 mH Common Mode Inductor (Pulse P0353)
C1, C2, C3 =	4.7uF ceramic
C4 =	Not used
C5 =	100uF electrolytic
C6, C7 =	8.2nF (@2kV if output is ref. to gnd.)
C8, C9 =	8.2nF (@2kV if output is ref. to gnd.)


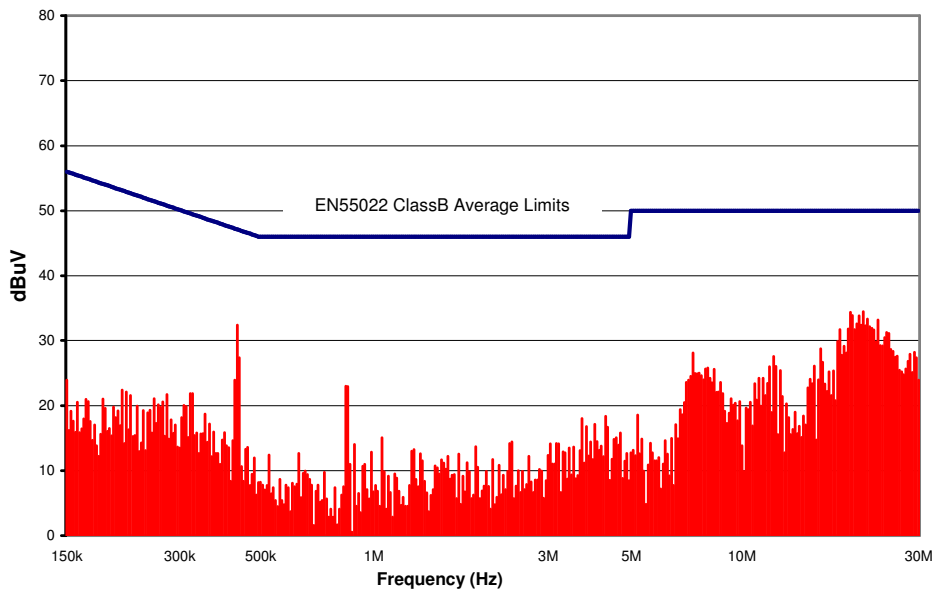


Figure 19. CPT10A18 Conducted Emissions using above specified input filter.  
 Vin = 24V, Full Resistive Load (12Vin - subtract 2dB from peaks)


## MODULE PIN ASSIGNMENT:

PIN #	DESIGNATION	NOTES
1	V <sub>IN</sub> (+)	1) All dimensions in inches [mm] Tolerances: .xx ± 0.02 [.x ± .5] .xxx ± 0.010 [.xx ± .25]
2	On/Off	
3	V <sub>IN</sub> (-)	2) Input, on/off control and sense/trim pins are Ø 0.040" [1.02] with Ø 0.070" [1.77] standoff shoulders.
4	V <sub>OUT</sub> (-)	
5	Sense (-)	3) Output pins are Ø 1.57 mm (0.062") with Ø 0.093" [2.36] shoulders (note, shoulder sits .008" above mounting surface)
6	Trim	
7	Sense (+)	4) All pins are gold plated with nickel under plating. 5) Weight: 12.5 g (0.44 oz) open frame, 20.5g (0.72 oz) baseplated 6) Workmanship: Meet or exceeds IPC-A-610 Class II
8	V <sub>OUT</sub> (+)	

## MECHANICAL OUTLINE – THROUGH-HOLE:

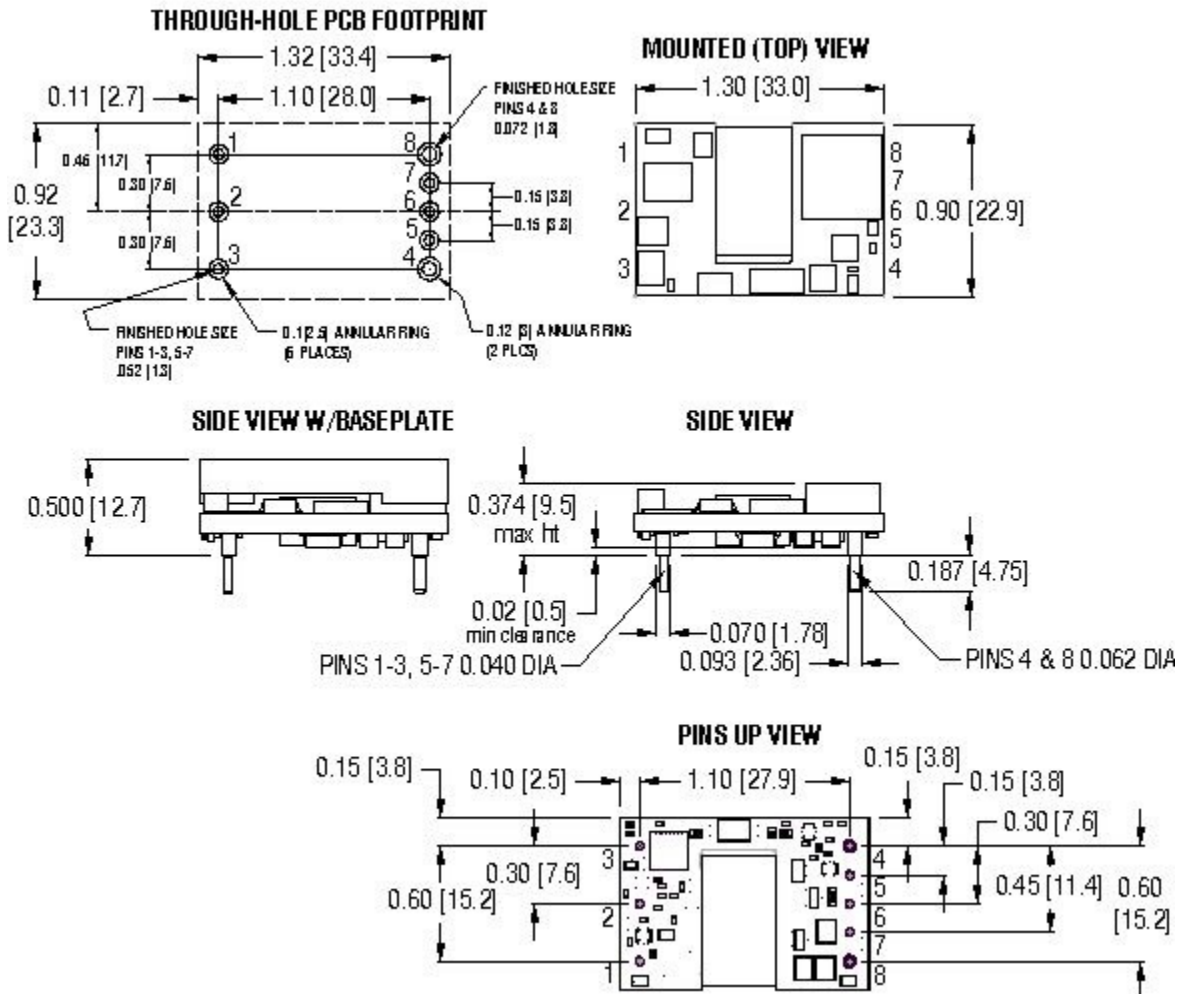

MECHANICAL OUTLINE - SURFACE MOUNT:

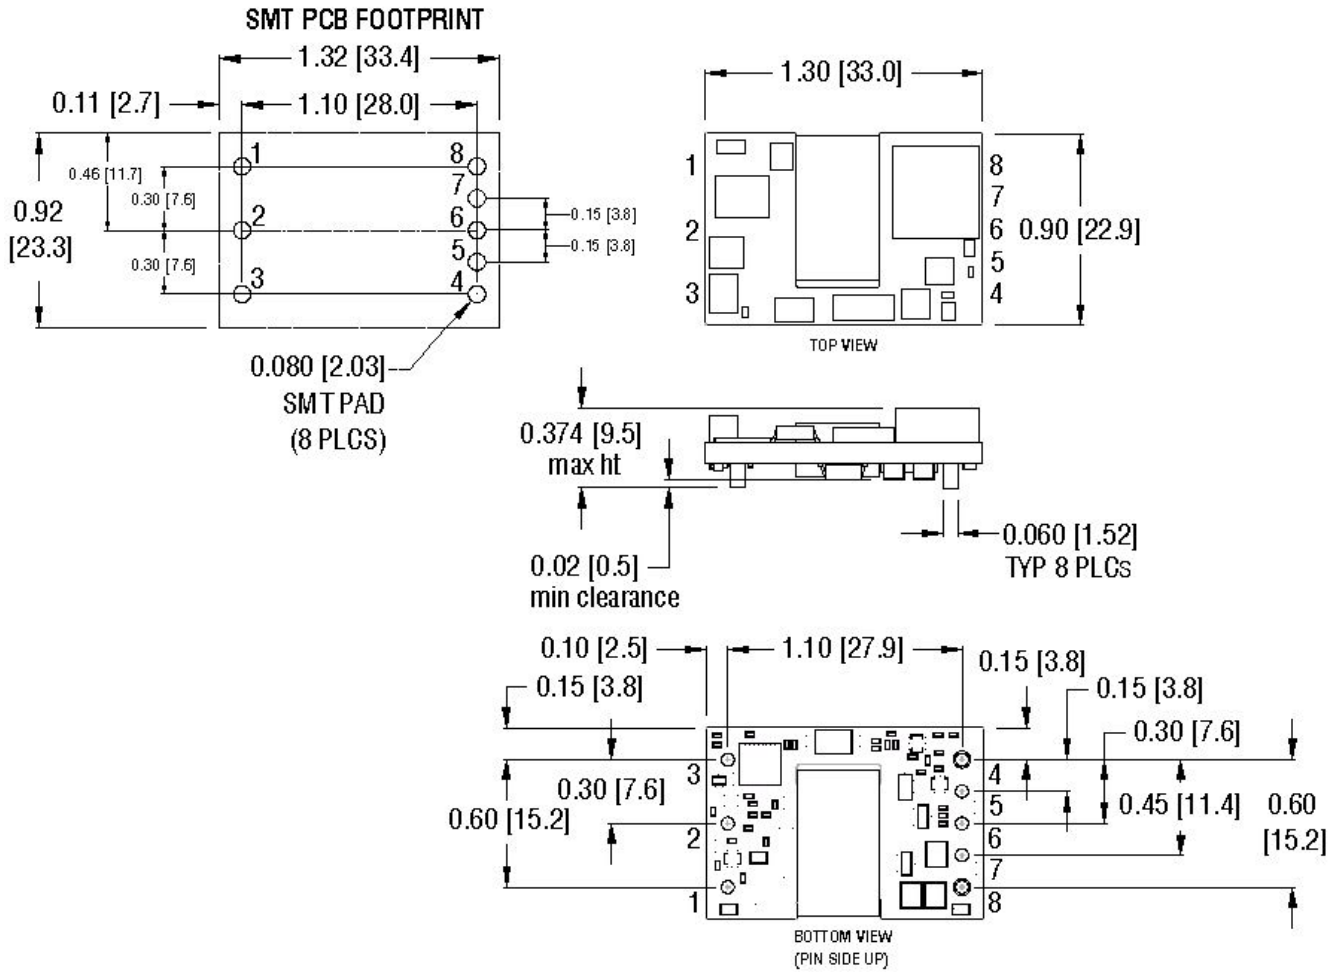

<b>ORDERING INFORMATION:</b>					
<b>Product Identifier</b>	<b>Output Current</b>	<b>Output Voltage</b>	<b>Input Voltage</b>	<b>Enable logic option</b>	<b>Additional features</b>
CPT	10	A	18	N or P	S or B
“Cool Power Technologies”	10A	5.0V	9 – 36V	N = Negative P = Positive	S = Surface Mount B = Baseplate Option

Rev 1.0, 9-January-20

