

Electrical characteristics are guaranteed over the max baseplate temperature range (-40 to 105°C), for the full range of input voltage (V_i), and for the full load range ($I_{o\ min}$ to $I_{o\ rated}$) unless otherwise noted. V_i , V_o , and I_o are actual operating conditions, $I_{o\ rated}$ is nominal rating.

Electrical Specifications

18.0-75.0V in; $\pm 12.0V/\pm 0.840A$ out

Input Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_i	Input voltage		18	48.0	75.0	V
P_{IL}	No load input power	$V_i = V_{Inom}$		0.2		W
C_{IN}	Input capacitance (internal)			2.2		μF
I_i	Input ripple current ❶	$V_i = V_{nom}, I_o = I_{o\ rated}$		100		mA p-p

Output Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Units
P_{Omax}	Total output power ❷			20		W
V_{O1nom}	Nominal (factory set) output voltage Output 1		± 11.88	± 12.00	± 12.12	V
$I_{O1rated}$	Rated output current Output 1	$T_{Baseplate} = 105^\circ C$	± 0.84		± 0.840	A
	Noise and ripple ❸ Output 1	PK-pk, 20MHz bandwidth with a 0.1 μF ceramic capacitor			100	mV
V_{O1}	Load regulation ❹	From 10% to 100% of rated output current		0.1	0.5	% V_{O1}
V_{O1}	Line regulation ❹	V_{imin} to V_{imax} $I_o = I_{otyp}$		0.1	0.25	% V_{O1}
I_{O1lim}	Current limit	Total output current	1.8			A

Electrical characteristics are guaranteed over the max baseplate temperature range (-40 to 105°C), for the full range of input voltage (V_i), and for the full load range ($I_{o\ min}$ to $I_{o\ rated}$) unless otherwise noted. V_i , V_o , and I_o are actual operating conditions, $I_{o\ rated}$ is nominal rating.

Electrical Specifications

18.0-75.0V in; ±12.0V/±0.840A out

Output Characteristics - continued

Symbol	Parameter	Conditions	Min	Typ	Max	Units
η	Efficiency	$V_i = 12.0\text{ Vdc}$, $I_o = I_{o\ rated}$ (see eff. graph)	85	86		%
t_{on}	Turn-on time	$V_i = 0$ to V_{Inom}		100		mS
	Transient Response	positive or negative step $I_o = 0\%$ to $100\% I_{o\ rated}$ @ $1A/\mu s$ total deviation		2 3	3 4	ms % $V_{O1\ nom}$

Control Signals -Pins

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{Out}	Output Voltage	Remote On/Off pin $2.5 < V_c < 5.5$ or open circuit $V_c < 0.8V$		12.0 0		V V
V_{Out}	Output Voltage	Trim Adjust	90		110	%



Electrical characteristics are guaranteed over the max baseplate temperature range (-40 to 105°C), for the full range of input voltage (V_i), and for the full load range ($I_{o\ min}$ to $I_{o\ rated}$) unless otherwise noted. V_i , V_o , and I_o are actual operating conditions, $I_{o\ rated}$ is nominal rating.

Electrical Specifications

18.0-75.0V in; ±12.0V/±0.840A out

Isolation Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Units
	Input to Output	1500Vdc	10			Mohm
	Output to Baseplate	1500 Vdc	10			Mohm

Notes:

- ❶ Input ripple current measured with no additional external input filtering.
- ❷ Total output power of converter may not be exceeded by the trim function increasing V out. The rated power output is based on the V out measurement obtained at the output power pins multiplied by the output current.
- ❸ Output ripple and noise measured is specified over a 20MHz bandwidth. When testing output ripple it is important to reduce the ground connection for the scope to less than .5". Output ripple measured with a 10 microfarad tantalum decoupling capacitor.
- ❹ Line and Load regulation are measured from the (+) output (pin 5), the (-) output (pin 7) and the common (pin 6). Measurements should be taken at the pins in order to eliminate variations caused by line loss due to highly resistive connections.



Figure 1

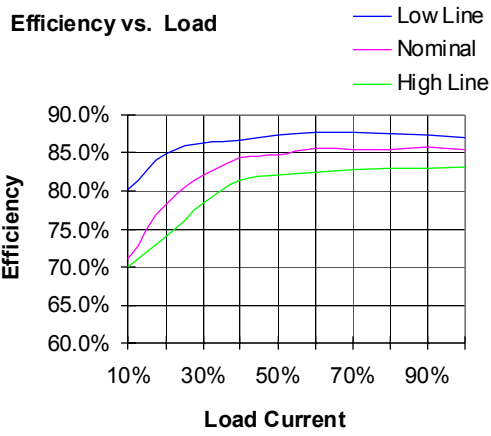


Figure 2


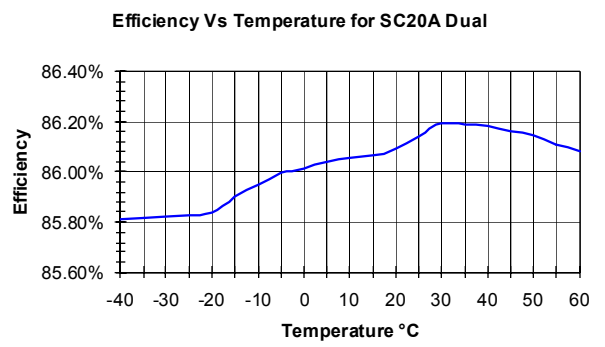


Figure 3

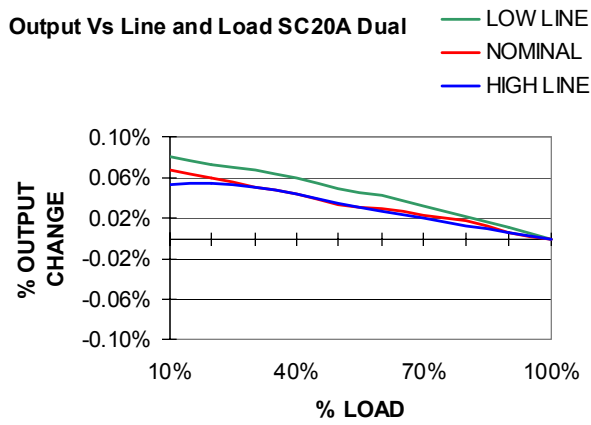

MTBF

Figure 4

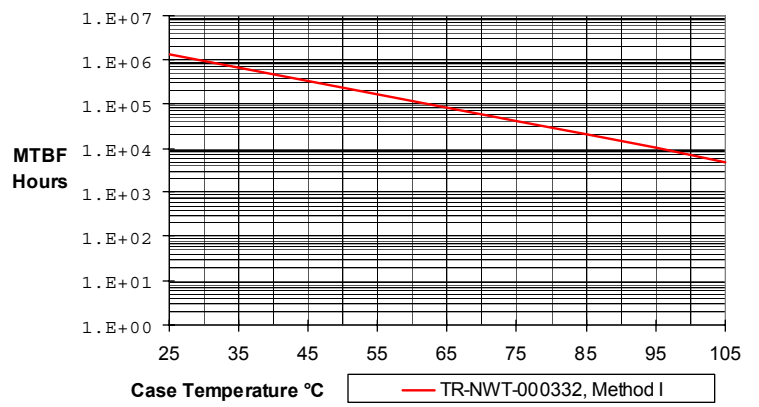


Figure 5

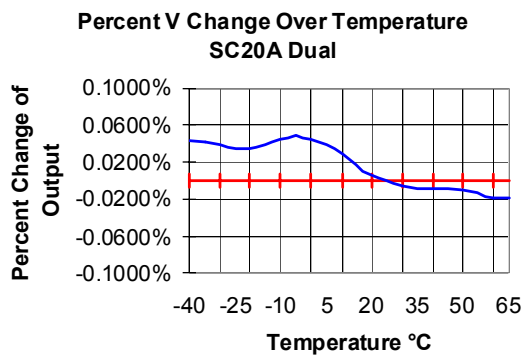


Figure 6


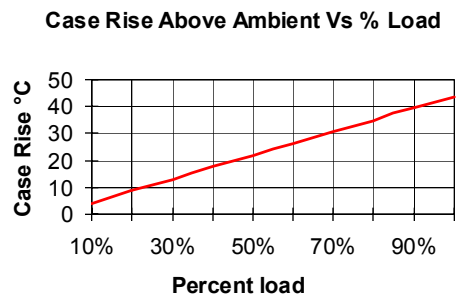



Figure 7

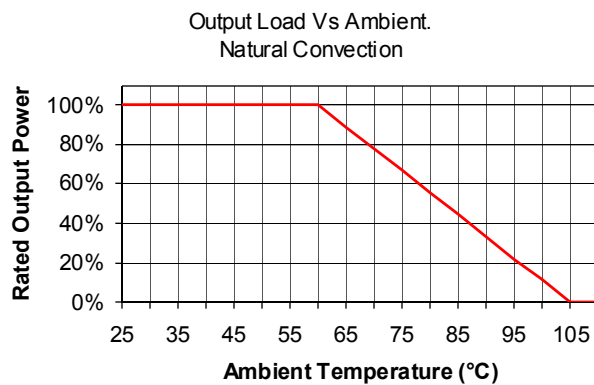

Turn on Characteristics (Typ)


$V_{in} = 48.0 \text{ Vdc}$, $I_{load} = \pm 0.840 \text{ A}$

Figure 8

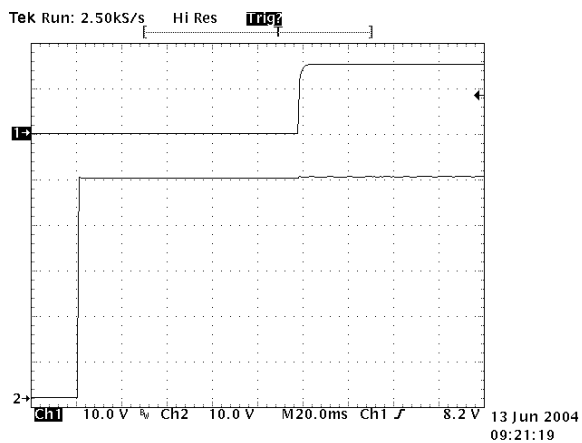


Input Reflected Ripple 10mA/mV

Figure 9

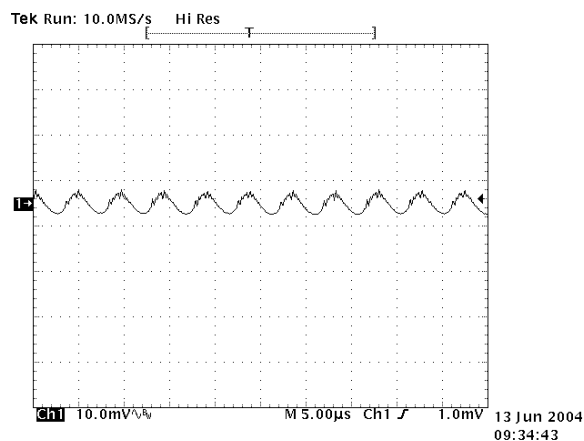


Enable going high

Figure 10

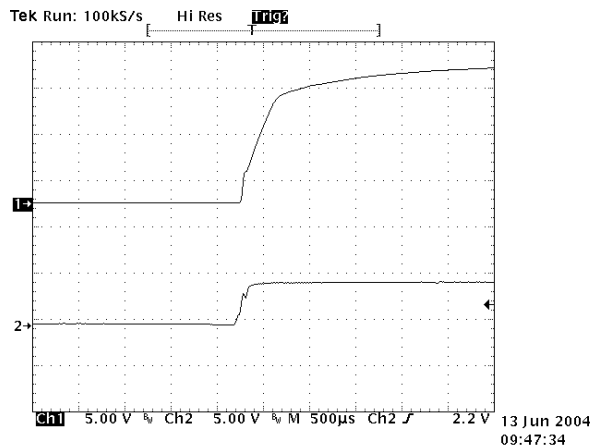

Enable going low

Figure 11

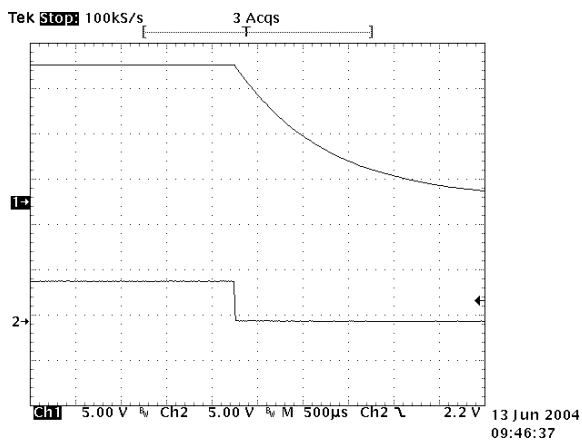


Output Characteristics (Typ)

Figure 12


Output Ripple

$V_{in} = 48.0 \text{ Vdc}$, $I_{load} = \pm 0.840 \text{ A}$

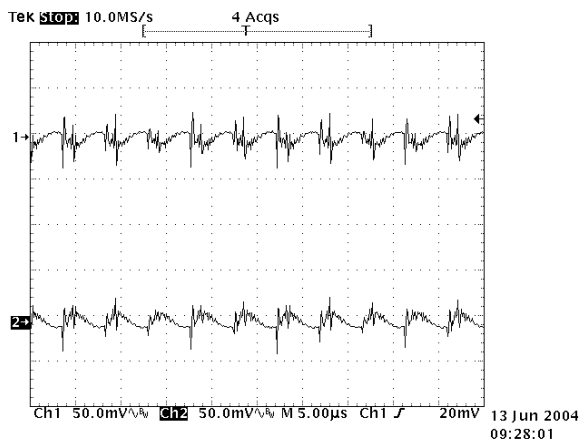

Dynamic Load Response
50%-100% load swing

Figure 13

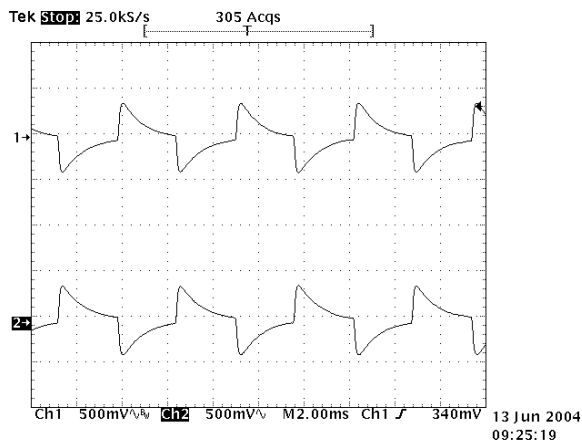


PIN CONNECTIONS

- 1. + Input
- 2. - Input
- 3. No Pin
- 4. ON/OFF Control
- 5. + Output
- 6. Output Common
- 7. - Output
- 8. Trim

Figure 14

PIN Diameters

Pins 1,2,4-8 0.040 ±0.002

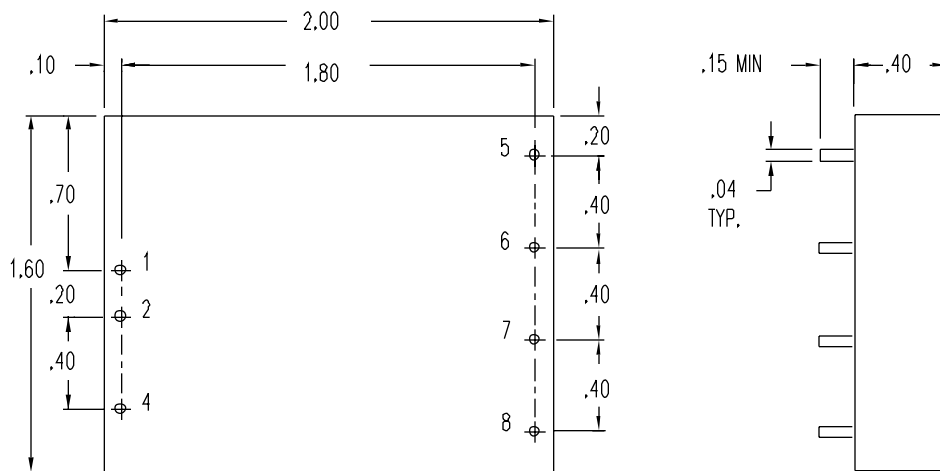

BOTTOM VIEW

Figure 11

